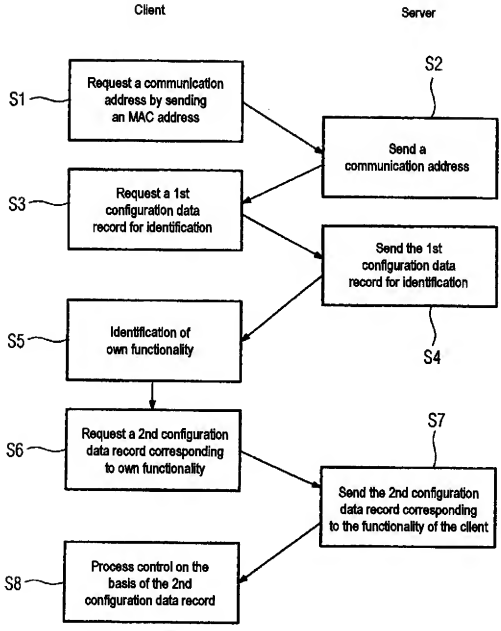
Client
Server
S1
Request a communication address by sending an MAC address
S2
Send a communication address
S3
Request a 1st configuration data record for identification
Send the 1st configuration data record for identification
S4
S5
Identification of own functionality
S6
Request a 2nd configuration data record corresponding to own functionality
S7
Send the 2nd configuration data record corresponding to the functionality of the client
S8
Process control on the basis of the 2nd configuration data record